



VERSATACH 3-IN-1 PLOW

**Imagine the Convenience
and Savings of
Three Plows in One!**



844.BLU.PLOW
(844.258.7569)

www.danielsplows.com

Standard Plow Features

- Leading edges of wings are curved and reinforced with an angled shoe for safety when approaching curbs
- Unlike some competitor plows, Daniels Plows uses pins and machined bushings for all connection and swivel points for equipment and longevity
- Hydroturn the VersaTach Plow 35 degrees left and right in any position.
- Double-acting Angle Cylinders with 35 degree maximum plow angling
- Double-acting Wing Cylinders with 90 degree maximum wing rotation
- Hydraulic cylinder rods are black nitride treated for 5x corrosion resistance and extreme durability
- Hydraulic Manifold with plow angle relief built-in
- Electric three position switch for angling and independent wing pivot control
- Electrical quick disconnect fittings to manifold solenoids
- Full Moldboard Trip
- Drive straight on a trailer to easily cover multiple sites
- Fully Welded Construction

SAY YES TO THE VERSATACH!


1. Flick of a switch from inside the cab!
2. Full hydraulic plow transforms from a Straight Blade to a Box Plow and any shape in between
3. Each wing controlled separately
4. Entire plow hydroturns 35 degrees in either direction in all positions
5. Offers an unlimited combination of shapes that best match snow and surface conditions

SAY NO TO INCONVENIENCE

- NO more returning to the shop to swap out plows
- NO more trying to make a Straight Blade do the work of a Box Plow
- NO more loss of maneuverability when pushing as a box

VersaTach Plow Specifications

Model Number	VT12
Plow Width *In Straight Postion	12.5'
Plow Outside Width *In Box Postion	100"
Center Plow Width	6.5'
Each Wing (when straight, independently pivoting wings adjustable from 1 degree to 90 degrees)	3'
Inside Box Width	6'
Width When Hydroturned *In Straight Postion	10'
Moldboard Height	27"
Moldboard Material	11 Gauge
Reinforcement Material	1/4" Min.
Tripping Points	5
Trip Springs	4
Weight (lbs.)	1500
Wear Edge	3/4" x 8"

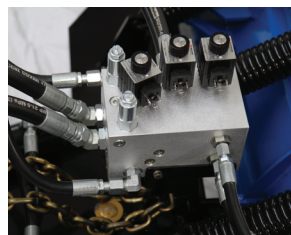

The VersaTach Plow utilizes the hydraulics from your machine's 3rd valve. By connecting the 3rd valve lines to the VersaTach, the hydraulic manifold allows the 3-in-1 Plow to angle left and right 35 degrees and pivot the wings to the degree needed.



Relief is built into the hydraulic manifold to relieve pressure to the VersaTach Plow as it angles when an obstruction is met. Electric switch is supplied with the VersaTach Plow with three positions to control the angling of the Plow and each Wing at any degree independently.


AVAILABLE OPTIONS



Optional skid shoe



Optional curb guards

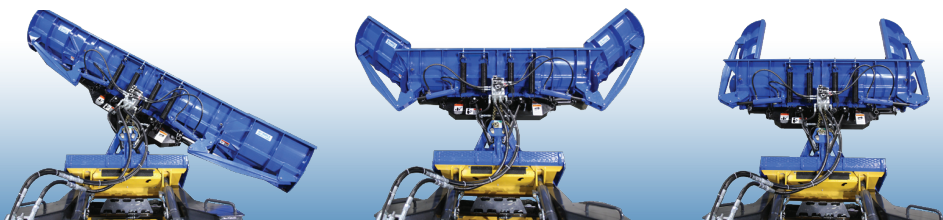

844-BLU-PLOW • www.danielsplows.com

